



ENGINES AND TECHNICAL SPECIFICATION

Range Rover features advanced engine options, providing new levels of performance, efficiency, and refinement. There is an extended range plug-in Electric Hybrid (PHEV) for all-electric, zero tailpipe emissions driving, as well as petrol and diesel engine options.

1

STANDARD WHEELBASE

View the available engines, their fuel economy and specifications.

2

LONG WHEELBASE / LONG WHEELBASE SEVEN SEATS

View the available engines, their fuel economy and specifications.

3

DIMENSIONS AND CAPABILITIES

View the ride height, turning circle and other capability specifications.

STANDARD WHEELBASE

			PETROL ELECTRIC HYBRID (PHEV)	
ENGINE			P460e	P550e
Plug-in Hybrid Electric Vehicle (PHEV)			■	■
Transmission			Automatic	Automatic
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)
Maximum power (PS (kW) / rpm)			460 (338,3) / 5.500-6.500*	550 (404,5) / 5.500-6.500*
Maximum torque (Nm / rpm)			660 / 1.000-4.500	800 / 1.500-4.500
Capacity (cc)			2,997	2,997
No. of cylinders / Valves per cylinder			6 / 4	6 / 4
Cylinder layout			In-line	In-line
Bore / stroke (mm)			83 / 92.3	83/92.3
Compression ratio (:1)			10,6	10,6
FUEL ECONOMY – WLTP**				
WLTP Consumption	Low	l/100km (mpg)	-	-
	Medium	l/100km (mpg)	-	-
	High	l/100km (mpg)	-	-
	Extra High	l/100km (mpg)	-	-
	Combined	l/100km (mpg)	2,8- 3,3 (102,0 - 86,4)	2,8- 3,4 (102,7 - 84,3)
WLTP CO ₂ Emissions	Low	g/km	-	-
	Medium	g/km	-	-
	High	g/km	-	-
	Extra High	g/km	-	-
	Combined	g/km	63 - 74	62 - 76
Fuel tank capacity - useable litres			71,5	71,5
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCR / GPF)			■	■

■ Standard - Not Available.

*When combined with electric motor. **The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.

STANDARD WHEELBASE

	PETROL ELECTRIC HYBRID (PHEV)	
	P460e	P550e
PERFORMANCE		
Acceleration (secs) 0-100 km/h (0-60 mph)*	5,7 (5,5)	4,9 (4,6)
Maximum speed km/h (mph)	225 (140)	242 (150)
BATTERY AND CHARGING TIMES		
Battery capacity total (Usable) kWh	38,2 (31,8)	38,2 (31,8)
Home Charger / Wall box 7kW	5 hours to 100%	5 hours to 100%
DC Charger 50kW	40 mins to 80%	40 mins to 80%
Domestic Power Socket**	15 hours to 100%	15 hours to 100%
Charging cable length (m)	5	5
ELECTRIC MOTOR DATA		
Maximum Power kW	160	160
Maximum Torque (Nm)	450	450
EV Range Combined (WLTP†) km (miles)	116-104 (72-65)	116-102 (72-63)
EV Range expected Real World data (up to) km (miles)	90 (56)	90 (56)
BRAKES		
Front type	Ventilated disc	Ventilated disc
Front diameter (mm)	380	400
Rear type	Ventilated disc	Ventilated disc
Rear diameter (mm)	355	370
Park Brake	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper
WEIGHTS (kg)**		
Unladen weight (EU)†	2.810	2.810
Unladen weight (DIN)**	2.735	2.735
Gross Vehicle Weight (GVW)	3.480	3.480
TOWING (kg)		
Unbraked trailer	750	750
Maximum towing	3.000	3.000
Maximum coupling point (nose weight)	120	120
Maximum vehicle and trailer combination	6.480	6.480
ROOF CARRYING (kg)		
Maximum roof load (including cross bars)	100	100

*With Dynamic Launch engaged. **Optional Home charging cable required. †The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route. **Weights reflect vehicles to standard specifications. Optional extras increase weight. †Includes a 75kg driver, full fluids and 90% fuel. **Includes full fluids and 90% fuel.

STANDARD WHEELBASE

			PETROL MILD HYBRID (MHEV)		
			P360	P380	P400
ENGINE			■	■	■
Mild Hybrid Electric Vehicle (MHEV)					
Transmission			Automatic	Automatic	Automatic
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)	All Wheel Drive (AWD)
Maximum power (PS (kW) / rpm)			360 (265) / 5.500-6.500	380 (280) / 5.000-6.000	400 (294) / 5.500-6.500
Maximum torque (Nm / rpm)			500 / 1.570-5.000	550/2.000-4.500	550 / 2.000-5.000
Capacity (cc)			2.996	2.997	2.996
No. of cylinders / Valves per cylinder			6 / 4	6 / 4	6 / 4
Cylinder layout			In-line	In-line	In-line
Bore / stroke (mm)			83,0 / 92,3	83,0 / 92,3	83,0 / 92,3
Compression ratio (:1)			10,5	10,6	10,5
FUEL ECONOMY – WLTP*					
WLTP Consumption	Low	l/100km (mpg)	-	14,9 - 15,3 (19,0 - 18,5)	-
	Medium	l/100km (mpg)	-	9,3 - 10,1 (30,3 - 27,9)	-
	High	l/100km (mpg)	-	7,9 - 8,6 (35,7 - 32,8)	-
	Extra High	l/100km (mpg)	-	9,3 - 10,5 (30,4 - 27,0)	-
	Combined	l/100km (mpg)	-	9,6 - 10,5 (29,4 - 27,0)	-
WLTP CO ₂ Emissions	Low	g/km	-	336 - 345	-
	Medium	g/km	-	210 - 229	-
	High	g/km	-	179 - 194	-
	Extra High	g/km	-	210 - 237	-
	Combined	g/km	-	217 - 236	-
Fuel tank capacity - useable litres			90	90	90
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCR / GPF)			■	■	■

■ Standard - Not Available.

*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.

STANDARD WHEELBASE

	PETROL MILD HYBRID (MHEV)		
	P360	P380	P400
PERFORMANCE			
Acceleration (secs) 0-100 km/h (0-60 mph)*	6,2 (5,9)	5,6 (5,3)	5,6 (5,3)
Maximum speed km/h (mph)	225 (140)	242 (150)	242 (150)
BRAKES			
Front type	Ventilated disc	Ventilated disc	Ventilated disc
Front diameter (mm)	380	380	380
Rear type	Ventilated disc	Ventilated disc	Ventilated disc
Rear diameter (mm)	355	355	355
Park Brake	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper
WEIGHTS (kg)**			
Unladen weight (EU)†	2.454	2.544	2.454
Unladen weight (DIN)††	2.379	2.469	2.379
Gross Vehicle Weight (GVW)	3.350	3.350	3.350
TOWING (kg)			
Unbraked trailer	750	750	750
Maximum towing	3.500	3.500	3.500
Maximum coupling point (nose weight)	150	150	150
Maximum vehicle and trailer combination	6.850	6.850	6.850
ROOF CARRYING (kg)			
Maximum roof load (including cross bars)	100	100	100

*With Dynamic Launch engaged. **Weights reflect vehicles to standard specifications. Optional extras increase weight. †Includes a 75kg driver, full fluids and 90% fuel. ††Includes full fluids and 90% fuel.

STANDARD WHEELBASE

			PETROL V8 MILD HYBRID (MHEV)		
ENGINE			P530	P540	P615
Transmission			Automatic	Automatic	Automatic
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)	All Wheel Drive (AWD)
Maximum power (PS (kW) / rpm)			530 (390) / 5.000-7.000	537 (395) / 5.100-6.000	615 (452) / 5.855-7.000
Maximum torque (Nm / rpm)			750 / 1.800-4.500	750 / 2.250-5.000	750 / 1.800-5.400
Capacity (cc)			4.395	4.395	4.395
No. of cylinders / Valves per cylinder			8 / 4	8 / 4	8 / 4
Cylinder layout			Longitudinal V	Longitudinal V	Longitudinal V
Bore / stroke (mm)			89 / 88,3	89 / 88,3	89 / 88,3
Compression ratio (:1)			10,5	10,5	10,5
FUEL ECONOMY – WLTP*					
WLTP Consumption	Low	l/100km (mpg)	19,3-19,6 (14,6-14,4)	19,8-20,3 (14,3-13,9)	19,5-19,6 (14,5-14,4)
	Medium	l/100km (mpg)	11,0-11,7 (25,6-24,1)	11,3-12,0 (25,0-23,6)	11,5-11,8 (24,6-24,0)
	High	l/100km (mpg)	9,2-9,7 (30,7-29,1)	9,5-10,0 (29,9-28,2)	9,6-9,8 (29,5-28,8)
	Extra High	l/100km (mpg)	10,2-10,9 (27,7-25,9)	10,3-11,0 (27,4-25,6)	10,8-11,1 (26,2-25,5)
	Combined	l/100km (mpg)	11,3-11,9 (25,1-23,8)	11,5-12,1 (24,6-23,3)	11,7-12,0 (24,1-23,6)
WLTP CO ₂ Emissions	Low	g/km	438-444	447 - 458	442-445
	Medium	g/km	250-265	256 - 270	260-267
	High	g/km	209-220	214 - 226	217-222
	Extra High	g/km	231-246	233 - 250	244-251
	Combined	g/km	255-269	260-274	265-271
Fuel tank capacity - useable litres			90	90	90
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCR / GPF)			■	■	■

■ Standard

*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.

STANDARD WHEELBASE

	PETROL V8 MILD HYBRID (MHEV)		
	P530	P540	P615
PERFORMANCE			
Acceleration (secs) 0-100 km/h (0-60 mph)*	4,6 (4,4)	4,6 (4,4)	4,6 (4,4)
Maximum speed km/h (mph)	250 (155)	250 (155)	261 (162)
BRAKES			
Front type	Ventilated disc	Ventilated disc	Ventilated disc
Front diameter (mm)	400	400	400
Rear type	Ventilated disc	Ventilated disc	Ventilated disc
Rear diameter (mm)	370	370	370
Park Brake	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper
WEIGHTS (kg)**			
Unladen weight (EU)†	2.585	2.585	2.791
Unladen weight (DIN)††	2.510	2.510	2.716
Gross Vehicle Weight (GVW)	3.380	3.380	3.380
TOWING (kg)			
Unbraked trailer	750	750	750
Maximum towing	3.500	3.500	3.500
Maximum coupling point (nose weight)	150	150	150
Maximum vehicle and trailer combination	6.880	6.880	6.880
ROOF CARRYING (kg)			
Maximum roof load (including cross bars)	100	100	100

*With Dynamic Launch engaged. **Weights reflect vehicles to standard specifications. Optional extras increase weight. †Includes a 75kg driver, full fluids and 90% fuel. ††Includes full fluids and 90% fuel.

STANDARD WHEELBASE

			DIESEL MILD HYBRID (MHEV)		
			D250	D300	D350
ENGINE			■	■	■
Mild Hybrid Electric Vehicle (MHEV)					
Transmission			Automatic	Automatic	Automatic
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)	All Wheel Drive (AWD)
Maximum power (PS (kW) / rpm)			249 (183) / 4.000	300 (221) / 4.000	350 (258) / 4.000
Maximum torque (Nm / rpm)			600 / 1.250-2.500	650 / 1.500-2.500	700 / 1.500-3.000
Capacity (cc)			2.997	2.997	2.997
No. of cylinders / Valves per cylinder			6 / 4	6 / 4	6 / 4
Cylinder layout			In-line	In-line	In-line
Bore / stroke (mm)			83 / 92,31	83 / 92,31	83 / 92,31
Compression ratio (:1)			15,5	15,5	15,5
FUEL ECONOMY – WLTP*					
WLTP Consumption	Low	l/100km (mpg)	11,5 - 12,0 (24,6 - 23,5)	11,5 - 12,1 (24,6 - 23,3)	11,5 - 12,1 (24,6 - 23,4)
	Medium	l/100km (mpg)	7,1 - 7,4 (40,0 - 38,2)	7,1 - 7,4 (40,0 - 38,0)	7,0 - 7,4 (40,1 - 38,0)
	High	l/100km (mpg)	5,9 - 6,4 (48,0 - 43,9)	5,9 - 6,5 (48,0 - 43,4)	5,9 - 6,5 (48,1 - 43,5)
	Extra High	l/100km (mpg)	7,0 - 8,0 (40,5 - 35,5)	7,0 - 8,1 (40,5 - 35,1)	7,0 - 8,0 (40,5 - 35,1)
	Combined	l/100km (mpg)	7,3 - 7,9 (38,9 - 35,7)	7,3 - 8,0 (38,9 - 35,4)	7,2 - 8,0 (39,0 - 35,4)
WLTP CO ₂ Emissions	Low	g/km	301-316	301-318	301-317
	Medium	g/km	185-194	185-195	185-195
	High	g/km	154-169	154-171	154-171
	Extra High	g/km	183-209	183-211	183-211
	Combined	g/km	191-207	191-210	190-209
Fuel tank capacity - useable litres			80	80	80
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCR / GPF)			■	■	■

■ Standard.

*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.

STANDARD WHEELBASE

	DIESEL MILD HYBRID (MHEV)		
	D250	D300	D350
PERFORMANCE			
Acceleration (secs) 0-100 km/h (0-60 mph)*	7,9 (7,5)	6,6 (6,3)	6,0 (5,7)
Maximum speed km/h (mph)	206 (128)	218 (135)	234 (145)
BRAKES			
Front type	Ventilated disc	Ventilated disc	Ventilated disc
Front diameter (mm)	380	380	380
Rear type	Ventilated disc	Ventilated disc	Ventilated disc
Rear diameter (mm)	355	355	355
Park Brake	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper
WEIGHTS (kg)**			
Unladen weight (EU)†	2.505	2.505	2.504
Unladen weight (DIN)††	2.430	2.430	2.429
Gross Vehicle Weight (GVW)	3.350	3.350	3.350
TOWING (kg)			
Unbraked trailer	750	750	750
Maximum towing	3.500	3.500	3.500
Maximum coupling point (nose weight)	150	150	150
Maximum vehicle and trailer combination	6.850	6.850	6.850
ROOF CARRYING (kg)			
Maximum roof load (including cross bars)	100	100	100

*With Dynamic Launch engaged. **Weights reflect vehicles to standard specifications. Optional extras increase weight. †Includes a 75kg driver, full fluids and 90% fuel.

††Includes full fluids and 90% fuel.

LONG WHEELBASE / LONG WHEELBASE SEVEN SEATS

			PETROL ELECTRIC HYBRID (PHEV)		PETROL V8					
			P460e		P530		P540		P615	
ENGINE			■		-		-		-	
Plug-in Hybrid Electric Vehicle (PHEV)										
Transmission			Automatic		Automatic		Automatic		Automatic	
Driveline			All Wheel Drive (AWD)		All Wheel Drive (AWD)		All Wheel Drive (AWD)		All Wheel Drive (AWD)	
Maximum power (PS (kW) / rpm)			460 (338,3) / 5.500-6.500*		530 (390) / 5.000-7.000		537 (395) / 5.100-6.000		615 (452) / 5.855 - 7.000	
Maximum torque (Nm / rpm)			660 / 1.000-4.500		750 / 1.800-4.250		750 / 2.250-5.000		750 / 1.800-4.500	
Capacity (cc)			2.997		4.395		4.395		4.395	
No. of cylinders / Valves per cylinder			6 / 4		8 / 4		8 / 4		8 / 4	
Cylinder layout			In-line		Longitudinal V		Longitudinal V		Longitudinal V	
Bore / stroke (mm)			83,0 / 92,3		89 / 88,3		89 / 88,3		89 / 88,3	
Compression ratio (:1)			10,6		10,5		10,5		10,5	
FUEL ECONOMY – WLTP**										
Seating			5		5 / 7		5 / 7		5	
EV Range			Combined km (miles)		116-102 (72-63)		-		-	
			Low l/100km (mpg)		-		19,9-20,4 (14,2-13,9) / 20,1-20,3 (14,0-13,9)		19,5-19,6 (14,5-14,4)	
			Medium l/100km (mpg)		-		11,3-11,8 (25,1-23,9) / 11,5-11,7 (24,6-24,1)		11,5-11,8 (24,7-23,9)	
WLTP Consumption			High l/100km (mpg)		-		9,4-9,8 (30,2-28,8) / 9,5-9,7 (29,7-29,0)		9,6-10,1 (29,4-27,9) / 9,7-10,0 (29,0-28,2)	
			Extra High l/100km (mpg)		-		10,3-11,0 (27,3-25,7) / 10,5-10,9 (26,9-25,8)		10,4-11,2 (27,1-25,3) / 10,6-11,1 (26,7-25,5)	
			Combined l/100km (mpg)		2,8 - 3,3 (102,3 - 84,8)		11,4-12,0 (24,7-23,6) / 11,6-11,9 (24,3-23,8)		11,7-12,3 (24,2-23,1) / 11,8-12,2 (23,9-23,2)	
			Low g/km		-		440-445 / 442-444		451-461 / 455-459	
			Medium g/km		-		255-268 / 261-266		261-274 / 265-271	
WLTP CO ₂ Emissions			High g/km		-		212-222 / 215-221		217-229 / 220-227	
			Extra High g/km		-		234-249 / 238-248		236-252 / 239-251	
			Combined g/km		62 - 75		259-271 / 263-269		264-277 / 267-275	
Fuel tank capacity - useable litres			71,5		90		90		90	
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCR / GPF)			■		■		■		■	

■ Standard - Not Available.

*When combined with electric motor. **The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.

LONG WHEELBASE / LONG WHEELBASE SEVEN SEATS

	PETROL ELECTRIC HYBRID (PHEV)		PETROL V8		
	P460e	P530	P540	P615	
PERFORMANCE					
Seating	5	5 / 7	5 / 7	5	
Acceleration (secs) 0-100 km/h (0-60 mph)*	5,8 (5,6)	4,7 (4,5) / 4,8 (4,6)	4,7 (4,5) / 4,8 (4,6)	4,7 (4,4)	
Maximum speed km/h (mph)	225 (140)	250 (155)	250 (155)	261 (162)	
BATTERY AND CHARGING TIMES					
Battery capacity total (Usable) kWh	38,2 (31,8)	-	-	-	
Home Charger / Wall box 7kW	5 hours to 100%	-	-	-	
DC Charger 50kW	40 mins to 80%	-	-	-	
Domestic Power Socket**	15 hours to 100%	-	-	-	
Charging cable length (m)	5	-	-	-	
ELECTRIC MOTOR DATA					
Maximum Power PS (kW)	160	-	-	-	
Maximum Torque (Nm)	450	-	-	-	
EV Range Combined (WLTP†) km (miles)	116-102 (72-63)	-	-	-	
EV Range expected Real World data (up to) km (miles)	90 (56)	-	-	-	
BRAKES					
Front type	Ventilated disc	Ventilated disc	Ventilated disc	Ventilated disc	
Front diameter (mm)	380	400	400	400	
Rear type	Ventilated disc	Ventilated disc	Ventilated disc	Ventilated disc	
Rear diameter (mm)	355	370	370	370	
Park Brake	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	
WEIGHTS (kg)**					
Seating	5	5 / 7	5 / 7	5	
Unladen weight (EU)†	2.810	2.708 / 2.810	2.706 / 2.805	2.785	
Unladen weight (DIN)**	2.735	2.633 / 2.735	2.631 / 2.730	2.710	
Gross Vehicle Weight (GVW)	3.480	3.400 / 3.480	3.400 / 3.450	3.400	

- Not Available.

*With Dynamic Launch engaged. **Optional Home charging cable required. †The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route. ††Weights reflect vehicles to standard specifications. Optional extras increase weight. ‡Includes a 75kg driver, full fluids and 90% fuel. ‡‡Includes full fluids and 90% fuel.

LONG WHEELBASE / LONG WHEELBASE SEVEN SEATS

	PETROL ELECTRIC HYBRID (PHEV)	PETROL V8		
	P460e	P530	P540	P615
TOWING (kg)				
Seating	5	5 / 7	5 / 7	5
Unbraked trailer	-	750	750	750
Maximum towing	-	3.500	3.500	3.500
Maximum coupling point (nose weight)	-	150	150	150
Maximum vehicle and trailer combination	-	6.900 / 6.980	6.900 / 6.950	6.900
ROOF CARRYING (kg)				
Maximum roof load (including cross bars)	100	100	100	100

LONG WHEELBASE / LONG WHEELBASE SEVEN SEATS

			PETROL MILD HYBRID (MHEV)		
			P360	P380	P400
ENGINE			■	■	■
Mild Hybrid Electric Vehicle (MHEV)					
Transmission			Automatic	Automatic	Automatic
Driveline			All Wheel Drive (AWD)	All Wheel Drive (AWD)	All Wheel Drive (AWD)
Maximum power (PS (kW) / rpm)			360 (265) / 5.500-6.500	380 (280) / 5.000-6.000	400 (394,5) / 5.500-6.000
Maximum torque (Nm / rpm)			500 / 1.570-5.000	550 / 2.000-4.500	550 / 2.000-5.000
Capacity (cc)			2.996	2.997	2.996
No. of cylinders / Valves per cylinder			6 / 4	6 / 4	6 / 4
Cylinder layout			In-line	In-line	In-line
Bore / stroke (mm)			83 / 92,3	83 / 92,3	83,0 / 92,3
Compression ratio (:1)			10.5	10,6	10.5
FUEL ECONOMY – WLTP*					
Seating			5 / 7	5 / 7	5 / 7
WLTP Consumption	Low	l/100km (mpg)	-	15,0-15,3 (18,9-18,4) / 15,1-15,2 (18,8-18,5)	-
	Medium	l/100km (mpg)	-	9,5-10,2 (29,9-27,6) / 9,6-10,1 (29,3-28,1)	-
	High	l/100km (mpg)	-	8,0-8,6 (35,4-32,7) / 8,1-8,5 (34,9-33,1)	-
	Extra High	l/100km (mpg)	-	9,4-10,5 (30,2-27,0) / 9,5-10,3 (29,9-27,3)	-
	Combined	l/100km (mpg)	-	9,7-10,5 (29,1-26,9) / 9,8-10,4 (28,7-27,2)	-
WLTP CO ₂ Emissions	Low	g/km	-	338-347 / 341-345	-
	Medium	g/km	-	214-232 / 218-228	-
	High	g/km	-	181-195 / 183-193	-
	Extra High	g/km	-	211-237 / 214-234	-
	Combined	g/km	-	219-238 / 222-235	-
Fuel tank capacity - useable litres			90	90	90
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCR / GPF)			■	■	■

■ Standard - Not Available.

*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.

LONG WHEELBASE / LONG WHEELBASE SEVEN SEATS

	PETROL MILD HYBRID (MHEV)		
	P360	P380	P400
PERFORMANCE			
Seating	5 / 7	5 / 7	5 / 7
Acceleration (secs) 0-100 km/h (0-60 mph)*	6,3 (6,0) / 6,5 (6,2)	5,7 (5,4) / 6,0 (5,6)	5,7 (5,4) / 5,9 (5,6)
Maximum speed km/h (mph)	225 (140)	242 (150)	242 (150)
BRAKES			
Front type	Ventilated disc	Ventilated disc	Ventilated disc
Front diameter (mm)	380	380	380
Rear type	Ventilated disc	Ventilated disc	Ventilated disc
Rear diameter (mm)	355	355	355
Park Brake	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper	Electric Park Brake (EPB) integrated into brake caliper
WEIGHTS (kg)**			
Seating	5 / 7	5 / 7	5 / 7
Unladen weight (EU)†	2.519 / 2.616	2.609 / 2.683	2.519 / 2.616
Unladen weight (DIN)††	2.444 / 2.541	2.534 / 2.608	2.444 / 2.541
Gross Vehicle Weight (GVW)	3.390 / 3.380	3.390 / 3.380	3.390/3.380
TOWING (kg)			
Seating	5 / 7	5 / 7	5 / 7
Unbraked trailer	750	750	750
Maximum towing	3.500	3.500	3.500
Maximum coupling point (nose weight)	150	150	150
Maximum vehicle and trailer combination	6.890 / 6.880	6.890 / 6.880	6.890 / -
ROOF CARRYING (kg)			
Maximum roof load (including cross bars)	100	100	100

*With Dynamic Launch engaged. **Weights reflect vehicles to standard specifications. Optional extras increase weight. †Includes a 75kg driver, full fluids and 90% fuel. ††Includes full fluids and 90% fuel.

LONG WHEELBASE / LONG WHEELBASE SEVEN SEATS

			DIESEL MILD HYBRID (MHEV)	
			D350	
ENGINE			■	
Mild Hybrid Electric Vehicle (MHEV)				
Transmission			Automatic	
Driveline			All Wheel Drive (AWD)	
Maximum power (PS (kW) / rpm)			350 (258) / 4.000	
Maximum torque (Nm / rpm)			700 / 1.500-3.000	
Capacity (cc)			2.997	
No. of cylinders / Valves per cylinder			6 / 4	
Cylinder layout			In-line	
Bore / stroke (mm)			83 / 92,3	
Compression ratio (:1)			15,5	
FUEL ECONOMY – WLTP*				
Seating			5 / 7	
WLTP Consumption	Low	l/100km (mpg)	11,6-12,1 (24,4-23,3) / 11,8-12,1 (24,0-23,4)	
	Medium	l/100km (mpg)	7,1-7,4 (39,7-37,9) / 7,2-7,4 (39,1-38,1)	
	High	l/100km (mpg)	5,9-6,5 (47,6-43,5) / 6,1-6,5 (46,7-43,7)	
	Extra High	l/100km (mpg)	7,0-8,0 (40,2-35,4) / 7,2-7,9 (39,5-35,5)	
	Combined	l/100km (mpg)	7,3 - 8,0 (38,6 - 35,5) / 7,5 - 7,9 (37,9 - 35,6)	
WLTP CO ₂ Emissions	Low	g/km	304-318 / 309-317	
	Medium	g/km	187-195 / 189-195	
	High	g/km	156-170 / 159-170	
	Extra High	g/km	185-209 / 188-209	
	Combined	g/km	192-209 / 196-208	
Fuel tank capacity - useable litres			80	
Selective Catalytic Reduction Filter / Gasoline Particulate Filter (SCR / GPF)			■	

■ Standard

*The figures provided are as a result of official manufacturer's tests in accordance with EU legislation with a fully charged battery. For comparison purposes only. Real-world figures may differ. CO₂, fuel economy, energy consumption and range figures may vary according to factors such as driving styles, environmental conditions, load, wheel fitment, accessories fitted, actual route and battery condition. Range figures are based upon production vehicle over a standardised route.

LONG WHEELBASE / LONG WHEELBASE SEVEN SEATS

	DIESEL MILD HYBRID (MHEV)
	D350
PERFORMANCE	
Seating	5 / 7
Acceleration (secs) 0-100 km/h (0-60 mph)*	6,1 (5,8) / 6,3 (6,0)
Maximum speed km/h (mph)	234 (145)
BRAKES	
Front type	Ventilated disc
Front diameter (mm)	380
Rear type	Ventilated disc
Rear diameter (mm)	355
Park Brake	Electric Park Brake (EPB) integrated into brake caliper
WEIGHTS (kg)**	
Seating	5 / 7
Unladen weight (EU)†	2.569 / 2.666
Unladen weight (DIN)††	2.494 / 2.591
Gross Vehicle Weight (GVW)	3.390 / 3.400
TOWING (kg)	
Seating	5 / 7
Unbraked trailer	750
Maximum towing	3.500
Maximum coupling point (nose weight)	150
Maximum vehicle and trailer combination	6.890 / 6.900
ROOF CARRYING (kg)	
Maximum roof load (including cross bars)	100

*With Dynamic Launch engaged. **Weights reflect vehicles to standard specifications. Optional extras increase weight. †Includes a 75kg driver, full fluids and 90% fuel. ††Includes full fluids and 90% fuel.

DIMENSIONS AND CAPABILITIES

VEHICLE HEIGHT

Standard Ride height 1.868.4mm
Access height air suspension setting will reduce the above by 50mm

OBSTACLE CLEARANCE

Off-road height (SWB / LWB) 291mm / 290mm
Standard ride height (SWB/LWB) 216mm / 215mm

TURNING CIRCLE

Kerb-to-kerb (SWB / LWB) 10,95m / 11,54m
Wall-to-wall (SWB / LWB) 11,37m / 11,96m
Turns lock-to-lock 2,78

WADING DEPTH

Maximum wading depth 900mm*

HEADROOM

Maximum front row headroom 999mm
Maximum second row headroom (SWB / LWB / LWB 7 Seats) 996,5mm / 978,3mm / 1.005mm
Maximum third row headroom (LWB 7 Seats) 909mm

LEGROOM

Maximum front row legroom (SWB / LWB / LWB 7 Seats) 1.013mm / 1.014mm / 1.014mm
Maximum second row legroom (SWB / LWB[†] / LWB 7 Seats) 1.027mm / 1.220mm / 1.027mm
Maximum third row legroom (LWB 7 Seats) 864mm

LOADSPACE CAPACITY**

Height 845,8mm
Width (SWB / LWB / LWB 7 Seats) 1.444mm / 1.444mm / 1.255mm
Width between arches (SWB / LWB / LWB 7 Seats) 1.057,3mm / 1.057,3mm / 1.059mm
Length behind first row (SWB / LWB / LWB 7 Seats) 1.975,5mm / 2.165mm / 2.175mm
Maximum loadspace volume behind first row** (SWB / LWB / LWB 7 Seats)
Dry[†] 1.841 / 2.176 / 2.050 litres
Wet^{††} 2.335 / 2.727,6 / 2.601 litres

Length behind second row** (SWB / LWB / LWB 7 Seats) 1.092,6mm / 1.093mm / 1.286mm

Maximum loadspace volume behind second row** (SWB / LWB / LWB 7 Seats)
Dry[†] 818 / 818 / 857 litres
Wet^{††} 1.050 / 1.050 / 1.061 litres


Length behind third row (LWB 7 Seats) 434mm

Maximum loadspace volume behind third row (LWB 7 Seats)
Dry[†] 212 litres
Wet^{††} 312 litres



Wheelbase (SWB / LWB / LWB 7 Seats)
2.997mm / 3.197mm / 3.197mm

Standard overall length (SWB / LWB / LWB 7 Seats)
5.052mm / 5.252mm / 5.252mm

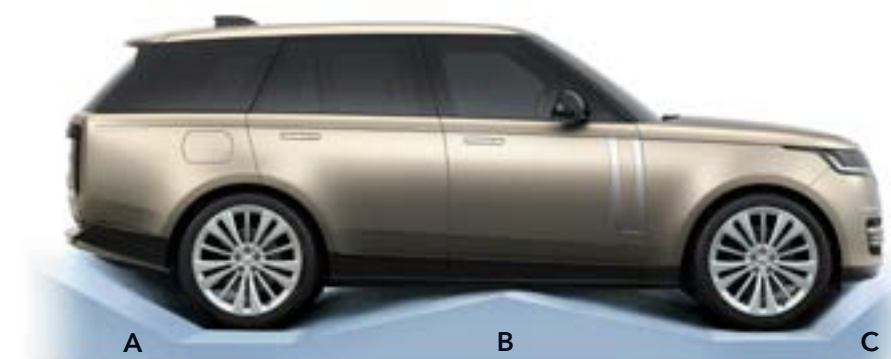

	A	B	C
Ride Height	Departure Angle	Ramp Angle (SWB / LWB / LWB 7 Seats)	Approach Angle
Off-road	29,0°	27,5° / 25,7° / 25,7°	34,7°
Standard	24,5°	21,5° / 20,1° / 20,1°	26,1°



Weights and dimensions shown apply to standard-specification, unladen vehicles, which may be affected by optional features and equipment.

*Wading depth (25 deg entry and exit) 750mm, Deep Fording depth (9 deg entry and exit) 900mm.
**Rear loadspace and Rear seat fold angle is reduced when Rear Executive Class seating is selected. Please contact your local retailer for more detail. [†]Dry: Volume as measured with VDA-compliant solid blocks (200mm x 50mm x 100mm). ^{††}Wet: Volume as measured by simulating the loadspace filled with liquid. [‡]Effective Legroom is reduced on SV when Sensory Floor is fitted. Please note: Figures relate to Standard Wheelbase (SWB), Long Wheelbase (LWB), and Long Wheelbase Seven Seats (LWB 7 Seats) models unless stated. Figures shown may also differ for PHEV or SV models.

